




Data Sheet PSB/8



| | |
|--|---|
| UL Certification | File Nr. E502533 for category QEUY2/8 for use below 1000V |
| Material | Polyester material reinforced with fiberglass BMC RF 3/20 |
| Operating Temperature | °C: - 40° + 130° |
| Fire reaction | UL94-V0 File Nr. E205214 |
| | HL2 according to the EN45545-2 |
| Elastic Deflection of the tooth with beginning of rupture | 1.130 kgs |
| Package | 30 pcs |
| Weight of package | 2,70 kgs |

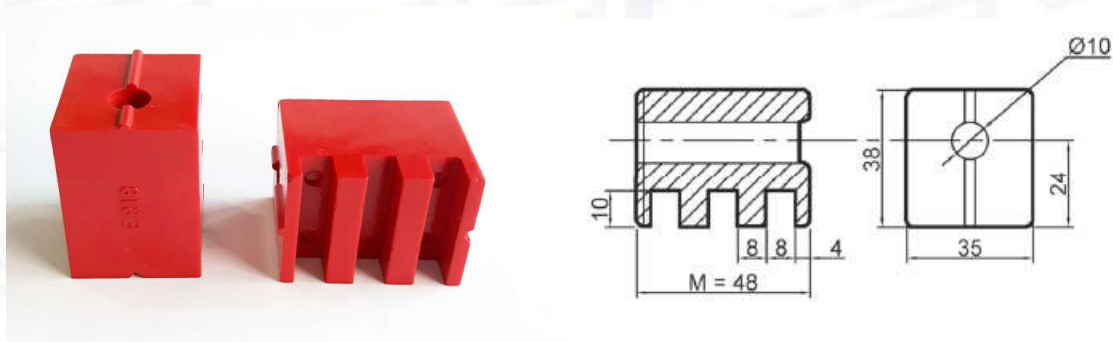

ERIM SRL

Via Bovisasca 24/26 - 20026 - Novate Milanese (MI) - Italy

Tel. (+39) 02/39100533 – Fax. (+39) 02/49698772 – info@erim.it – www.erim.it

P.I./C.F. IT 01803920154 – R.E.A. MI N. 875797 – Reg. Imp. N. 158589 Trib. MI

Cod. SDI SUBM70N