




Data Sheet CO/P 16

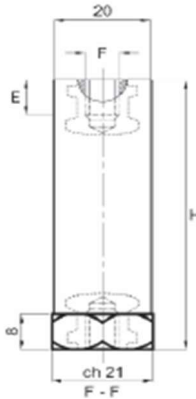

UL Certification	File Nr. E502533 for category QEUY2/8 for use below 1000V
Material	Polyester material reinforced with fiberglass BMC RF 3/20
Operating Temperature	°C: - 40° + 130°
Fire reaction	UL94-V0 File Nr. E205214
	HL2 according to the EN45545-2
Thread Material	Galvanized Steel
H	16 mm
E	M4, M5 and M6 : 3 mm / M8 : 4 mm
Tightening Torque	M4 : 2 Nm / M5 : 6 Nm / M6 : 8Nm / M8 : 10 Nm
Operating Voltage	220 V
A.C. surface flashover voltage	-
A.C. internal flashover voltage	-
Tensile stress	400 DN
Cantilever stress	250 DN
Compressive stress	2.100 DN
Twisting stress	0,6 - 1,7 DN x mm
Package	250 pcs
Weight of package	4,10 kgs

ERIM SRL

Via Bovisasca 24/26 - 20026 - Novate Milanese (MI) - Italy

Tel. (+39) 02/39100533 – Fax. (+39) 02/49698772 – info@erim.it – www.erim.it

P.I./C.F. IT 01803920154 – R.E.A. MI N. 875797 – Reg. Imp. N. 158589 Trib. MI

Cod. SDI SUBM70N